





RoHS Compliant Standard CFS-308·CFS-206·CFS-145·CFV-206

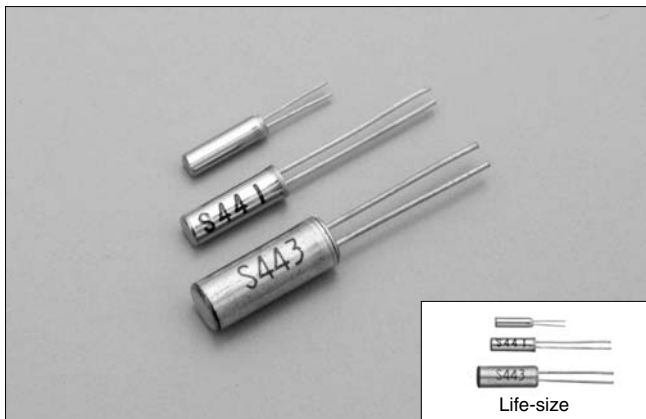

FEATURES

- Best suited for portable devices with low current consumption.
- For a clock source in digital equipment.

DIMENSION [mm]

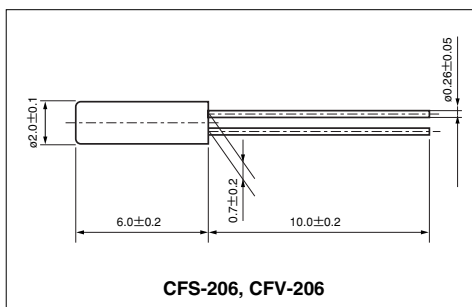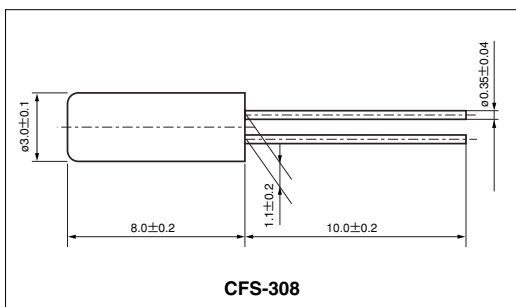

STANDARD SPECIFICATIONS

| Item | Model | CFS-308 | CFS-206 | CFS-145 | CFV-206 | Conditions |
|------------------------------|----------------|---------------------------------------|-------------|-------------------|------------------------|---|
| Nominal Frequency | f_0 | 32.768kHz | | | 30kHz~100kHz | Need to contact us for the available frequency in CFV-206 |
| Frequency Tolerance | $\Delta f/f_0$ | $\pm 20\text{ppm}$ | | | $\pm 30\text{ppm}$ | at 25°C |
| Load capacitance | C_L | 12.5pF | | 8.0pF | 12.5pF | Need to specify your requirement |
| Operating Temperature Range | T_{OPR} | -20°C ~ +70°C | | | | |
| Storage Temperature Range | T_{STR} | -40°C ~ +85°C | | | | |
| Turnover Temperature | T_M | 25°C \pm 5°C | | | | See figure 2 in P4 |
| Temperature Coefficient | β | -0.034 \pm 0.006ppm/°C ² | | | | |
| Motional (series) resistance | R_1 | 35K Ω Max. | | 40K Ω Max. | 50K Ω Max. | at 25°C |
| Level of drive | D_L | 1 μ W Max. | | | | |
| Aging (first year) | $\Delta f/f_0$ | $\pm 3\text{ppm}$ Max. | | | $\pm 5\text{ppm}$ Max. | 25°C \pm 3°C |
| Quality Factor | Q | 85000 Typ. | 70000 Typ. | 85000 Typ. | 70000~100000 Typ. | Depend on frequency |
| Shunt capacitance | C_0 | 1.6pF Typ. | 1.35pF Typ. | 1.00pF Typ. | 0.8~1.7pF Typ. | Depend on frequency |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Citizen:

[CFS308-32.768KDZF-UB](#) [CFS308-32.768KDZFB](#) [CFS308-32.768KDZBB](#)